




E-NVR6408-L



Push Notification




Product overview

The Newbridge E-NVR6408 is a 64 channels Network Video Recorder, support H.265 up to 64 IP cameras with bandwidth 300 Mbps, 48 TB HDD Capacity.

Key features and benefits: -

- 64-channel input
- ONVIF standard compatible.
- Mega Pixels (4K, 2K, FHD, HD)
- Support 2-ch HDMI, 1-ch VGA
- Up to 12 Megapixel resolution recording.
- 8-SATA HDD slots
- 300 Mbps video input
- **H.265** compression allow further reduce the network bandwidth consumptions in transmission and take up less storage space.

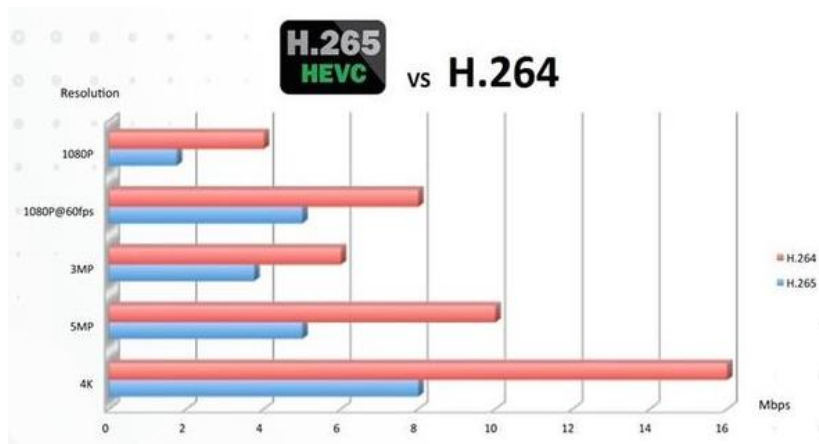


Specifications

Newbridge NVR	E-NVR6408-L
Video	
Video Input	64 channels, up to 64 IP Cameras
Video Output	1-port VGA, 2-port HDMI (1-port VGA and 1-port HDMI are identical channel support and resolution)
Audio	
Audio Input	1-port RCA
Audio Output	1-port RCA
Bit rate	64 kbps
Compression	G.711
Alarm	
Sensor Input	16
Output	4
Motion Detection	64 channels, up to 64 IP Cameras
Trigger Events	Recording, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips, alarm output
Display	
VGA	1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz
HDMI 1	4K (3840x 2160)/60Hz, 4K (3840x 2160)/30Hz, 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz
HDMI 2	1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz
Display	64CHxD1/36CHxD1/25CHxD1/16CHxD1/9CHxD1/4CHxD1/1CHx1080P/1CHx3MP/1CHx4MP/1CHx5MP/1CHx4k
Digital Zoom	Yes
OSD	Camera Title, Time, Video Loss, Recording, Motion Detection

Newbridge NVR	E-NVR6408-L
Recording	
Video Compression	H.264/H.265
Resolution	4k(4096×2160),5MP(2592×1944),4MP(2688×1520),3MP(2048×1536),1080P(1920×1080),960P(1280×960),720P(1280×720),D1 (704×576/704×480)
Record Rate	PAL :4k@30×25fp,5MP@36×25fp,4MP@36×25fp,3MP@36×25fp,1080P@36×25fp,960P@36×25fp,720P@36×25fp, D1@36×25fp NTSC: 4k@30×30fp,5MP@36×30fp,4MP@36×30fp,3MP@36×30fp,1080P@36×30fp,960P@36×30fp, 720P@36×30fp, D1@36×30fp
Record Mode	Manual\Timer\Motion Detection
Playback and Backup	
Local Sync Playback	4 channel x 4k
Remote Sync Playback	Support
Search Mode	All, Channel, Manual, Time, Date, Motion Detection
Playback Functions	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Digital Zoom
Backup Mode	USB Device/Network
Network	
Interface	2-port RJ45 10/100/1000BaseT
Network Functions	HTTP, TCP/IP, IPv4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, FTP, IP Search, P2P
Web Browser	IE6-11, Google Chrome (IE Tab), Firefox (IE Tab)
CMS Software	Support Windows 7/ Windows 8/Windows 10
Cloud Support(P2P)	Support
Smart Phone	iPhone, iPad, Android, Android Pad
Compatible Integration	ONVIF, API
Storage	
Interface	8-SATA Slots
Capacity	up to 48 TB
eSATA	1 eSATA Interface
General	
USB Interface	2 USB 2.0 Interfaces ,1 USB 3.0 Interface
RS485	1-port for PTZ control

Newbridge NVR	E-NVR6408-L
Power Supply	100 to 240VAC, 50 to 60 Hz
Operating Temperature	-10~55°C/10~90%
Dimension(W×D×H)	440mm x 450mm x 95mm, 2U
Weight	9.8KG (without HDD)

Dimensions

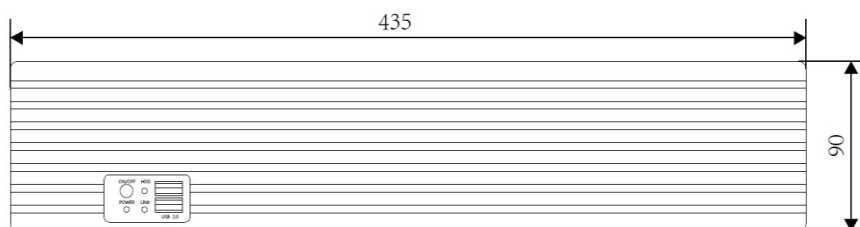

Rear Panel

